



All-Inclusive Fiber Optic Network Solution

Telecom



Layer 3 Chassis Switch

► CS-6306R/ CS6-S24S8X/ CS6-S16X/ CS6-S4Q

64 x 10G SFP+ 16 x 40G QSFP+



Enterprise



L3 Fiber Managed Switches

► XGS3-24242/SGS-6341-16S8C4XR/
XGS-6350-12X8TR/ GS-6320-46S2C4XR

12 x 10G SFP+ Max.



Data Center



Layer 3 100G Managed Switch

► XGS-6350-24X4C/ XGS-6350-48X2Q4C

24/48 x 10G SPF+ 4 x 100G QSFP28



Factory



Industrial L3 Managed Switches

► IGS-6325-8T8S/IGS-6325-8T8S4X

4 x 10G SFP+ -40~75°C



FTTx



Metro Ethernet Switches

► MGSW-28240F/MGSW-24160F
MGSD-10080F

4 x 10G SFP+ Max. -10~60°C



Building



Commercial and Industrial 10G Media Converters

► IXT-705AT/XT-705A

-10~60°C



Media Conversion

Centralized Media Converter Management



PLANET Media Converter Chassis allows the installation of up to 15 PLANET standard Media Converters with diverse choices, such as fiber, GEAPON, Ethernet, PoE, serial RS232/485 interfaces, VDSL2 and video to meet different network applications. It is very flexible for Media Converter series to be installed in the chassis for centralized media conversion management.

Web/SNMP/OAM Remote Management

For efficient management, the Managed Media Converters are equipped with remote Web interface. They also support the standard SNMP and TS-1000/802.3ah OAM protocol and can be managed via any standard management software.



Extension & Expansion

With the feature-rich chassis, the converters can easily expand the fiber-optic networks by simply plug and play. The wiring distance of PLANET Media Converter Chassis is extendable from 2 to 120 kilometers, and the Media Converter transmission distance is up to 120 kilometers.



DIN-rail Installation



Chassis Installation



Wall-mount Installation

Easy Installation

With standard cases, PLANET Media Converters provide a 3-way installation, including DIN rail, chassis and wall mount, to manage all devices more efficiently.

Environmentally Hardened Design

The Industrial Media Converter Series is equipped with the slim-type IP30 metal case for easy deployment in heavy Industrial demanding environments. Being able to operate under the temperature range from -40 to 75 degrees C, the Industrial Media Converter Series can be placed in almost any difficult environment.



Managed Media Converter Chassis



For powerful advanced fiber-optic function and cost-effective solution, PLANET Managed Media Converter Chassis series, MC-1610MR/MC-1610MR48, provides 16 Media Converter slots and one management system in a 19" rack chassis. The MC-1610MR/MC-1610MR48 is designed for FTTx applications by ISPs, telecoms, campuses and enterprises.

The MC-1610MR/MC-1610MR48 helps to easily build the FTTx installation and perfectly satisfies diverse demands. The 16 slots can be flexibly applied with PLANET Fast/Gigabit Ethernet Smart Media Converter (FST-8/GST-8/XST series) to construct network solution of FTTx (Fiber to the Home), FTTB (Fiber to the Building) or FTTC (Fiber to the Curb) for ISPs, enterprises and campuses. The MC-1610MR/MC-1610MR48 is a reliable and efficient solution for network application where distance and installation budget are highly concerned.

- High-quality 19" rack-mountable chassis installation
- Bay power isolation ensures each bay is electrically isolated from each other
- Installation of up to two fans for increased air-flow for system cooling
- One 10/100/1000Mbps Ethernet port and one RS232 port for management
- LED indicators for system, power and fan status
- NTP client (Time zone setting)
- Remote syslog and local system log
- DHCP client and DNS client
- Temperature detects display and alarm
- Web firmware upgrade
- PLANET Smart Discovery Utility for deployment management
- Media link/connection speed duplex status for each converter module
- Redundant backup system (Redundant Link Media Converter)

MC-1610MR

- Console/Telnet/Web/SNMP management
- 16 hot-swappable modular converter management
- TS-1000/802.3ah OAM remote terminal management
- Two power slots for redundant power, optional AC/-48V DC supplies

MC-1610MR48

- Console/Telnet/Web/SNMP management
- 16 hot-swappable modular converter management
- TS-1000/802.3ah OAM remote terminal management
- Two power slots for redundant power, optional AC/-48V DC supplies

Web/SNMP management

- OAM
- Device Control
- Redundant Link
- Link Status Monitoring
- SNMP Trap Alarm



Hot-swappable/flexible power input



Dual AC



Dual DC



DC + AC

Power Module

Smart Gigabit Media Converters



PLANET GST-80x Smart Gigabit Media Converter series extends communication distance with high Gigabit performance via fiber optic cable. The GST-80x series provides media conversion between 10/100/1000BASE-T and 1000BASE-SX/LX interfaces such as multi-mode LC/SC connectors (220m/550m), single-mode LC/SC connectors (10/20/40/80/120km) and single fiber connectors (WDM, 20/60km) for various fiber optic applications.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX Ethernet standard
- Choice of fiber connectors from SC, LC, WDM, multi-mode/ single-mode fiber/1000BASE-SX/ LX mini GBIC module
- Auto MDI/MDIX on TP port
- LLR /LLCF for fiber connection diagnostic
- IEEE 802.3ah OAM/TS-1000 OAM
- Manageable through MC-1610MR/MC-1610MR48
- LED indicators for converter status
- 9K jumbo frame size supported
- DIP switch for fiber (auto-negotiation/manual) and LFP function (disable/enable) setting
- EMI standards complies with FCC, CE class A

GST-802

- One 1000BASE-SX port with SC connector
- Supports fiber optic up to 550m

GST-802S

- One 1000BASE-LX port with SC connector
- Supports fiber optic up to 20km

GST-805A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

GST-806A15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GST-806B15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GST-806A60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

GST-806B60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

Smart Fast Ethernet Media Converters



PLANET Smart Fast Ethernet Media Converter, FST-80x series, extends communication distance with highly-stable performance via fiber optic cable. The FST-80x series provides media conversion between 10/100BASE-TX and 100BASE-FX interfaces such as multi-mode ST/SC connectors (2km), single-mode SC connector (15/35/50km), single fiber connector (WDM, 20km) and fiber connection options for various applications.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX and 100BASE-FX Ethernet standard
- One 10/100BASE-TX port with RJ45 connector, one 100BASE-FX port with ST/SC/WDM connector supporting multi-mode or single-mode fiber optic cable
- Auto MDI/MDIX on TP port
- LLR/LLCF for fiber connection diagnostic
- Manageable through MC-1610MR/MC-1610MR48
- LED indicators for converter status
- DIP switch to set fiber (HDX/FDX), UTP (auto-negotiation/manual), speed (10/100Mbps), duplex mode (half/full duplex mode), LLR (disable/enable), LLCF (disable/enable), flow control (disable/enable) and LFP function (disable/enable)
- EMI standards complies with FCC, CE class B

FST-801

- One 100BASE-FX port with ST connector
- Supports fiber optic up to 2km

FST-802

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 2km

FST-802S15

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 15km

FST-802S35

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 35km

FST-802S50

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 50km

FST-806A20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

FST-806B20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

Smart 10Gigabit Media Converters



With target applications including 1Gbps, 2.5Gbps, 5Gbps and 10G Ethernet switching, PLANET XST-705A Smart 10Gigabit Media Converter is ideal for wide applications for copper to fiber media conversion wherever 10Gigabit bandwidth is required.

The XST-705A has one RJ45 port and one SFP+ slot. It supports 10Gigabit Ethernet conversion from copper 10GBASE-T to fiber multi-mode or single-mode, utilizing 10GBASE-SR or 10GBASE-LR SFP+ transceiver installed in the SFP+ slot to extend distances to server switches and patch panels. The deployment distance can be extended from 300 meters (multi-mode) to up to 80 kilometers (single-mode).

The XST-705A is designed for use in network environments where the ultra-high bandwidth provided by 10Gigabit Ethernet is required, for example, data center cloud computing, enterprise backbones, campus networks, and carrier infrastructure.

XST-705A

- One 10GBASE-X SFP+ slot, supporting up to 80km (Vary on SFP module)
- One 10G/5G/2.5G/1G/100M RJ45 copper port
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6.A at 10Gbps
- Low power consumption
- Manageable through MC-1610MR/MC-1610MR48

Media Converter Chassis



Offering more capacity to the converters in one chassis, PLANET MC-700/MC-1500 provides 7/15 slots in the 10"/19" rack saving more spaces for fiber-optic wiring yet simplifying the maintenance of media conversion. It allows the connectivity of up to 7-/15-slot PLANET Fast Ethernet, Gigabit Ethernet or VDSL2 Converters in one chassis. One fan with LED indicators for the system cooling is also available.

Providing redundant power to gain more reliable media conversions, the MC-1500R/MC-1500R48 offers 15 slots for PLANET's full-ranging Media Converter series and 2 slots for 130W or DC -48V redundant power supply. It allows the connectivity of up to 15 PLANET Fast Ethernet, Gigabit Ethernet or VDSL2 Converters in one chassis. Two fans with LED indicators for the system cooling are also available.

The MC-700, MC-1500, MC-1500R and MC-1500R48 offer flexibility in installation and cost-effective scalable solution. With an independent power supply on each slot of the MC-700, MC-1500, MC-1500R and MC-1500R48, any converter is hot-swappable without causing an interruption to other converters. The Media Converters and power modules can be plugged and played anytime. Each bay of the Media Converter Chassis can be populated with any of PLANET's Media Converter series, the FT, GT, VC-23x and ICS, which provide media conversion between fiber optic, phone wire and serial to copper lines.

- High-quality 10"/19" rack-mountable chassis installation
- Bay power isolation ensures each bay is electrically isolated from each other
- Power protection: protection from over voltage, over current and short circuit
- One/two built-in fans for hardware cooling
- Supplies the converters and power modules to be plugged and played
- Reduces the effort of converter maintenance and management and diagnose the status at one time
- FCC Part 15 Class A, CE

MC-700

- 7-slot hot-swappable
- LED indicators for system status monitoring
- Built-in AC power supply unit

MC-1500

- 15-slot hot-swappable
- LED indicators for system status monitoring
- Built-in AC power supply unit

MC-1500R

- 15-slot hot-swappable
- LED indicators for system status monitoring
- One AC 100-240V power input
- Redundant power supply with option of 100~240V AC or -48V DC

MC-1500R48

- 15-slot hot-swappable
- LED indicators for system status monitoring
- One DC -48V power input
- Redundant power supply with option of 100~240V AC or -48V DC



MC-1500R Rear Panel

Gigabit Ethernet Media Converters



For the flexibility of all kinds of 10/100/1000Mbps Ethernet Media on RJ45 port and highly-stable Gigabit fiber performance, PLANET GT-802, GT-802S, GT-805A and GT-806A/B series and GT-1205A Gigabit Ethernet Media Converter extend communication distance with Gigabit performance via fiber optic cable. The GT-80x series and GT-1205A provide media conversion between 10/100/1000BASE-T and 1000BASE-SX/LX interfaces such as multi-mode LC/SC connectors (220m/550m), single-mode LC/SC connectors (10/20/40/80/120km) and single fiber connectors (WDM, 20/40/60km) for various fiber optic applications.

PLANET GT-80x series and GT-1205A Gigabit Ethernet Media Converter support auto MDI/MDI-X on their TP port. The GT-80x series provides DIP switch to configure the Link Fault pass-through function (LFP). LLCF/LLR can immediately alarm administrators the problem of the link media and provide efficient solution to monitoring the network. The DIP switch provides disabling or enabling the LFP function.

The GT-80x series and GT-1205A can be used as a standalone unit when powered by its DC adapter or used as a slide-in module to PLANET 10-/19-inch 7-/15-slot Media Converter Chassis (MC-700/MC-1500/MC-1500R/MC-1500R48).

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
- IEEE 802.3x full-duplex flow-control and back-pressure in half-duplex eliminate the loss of packets
- Auto MDI/MDIX on TP port
- 9K jumbo frame
- OAM terminal (TS-1000 and IEEE 802.3ah)
- LED indicators for easy network diagnostics
- External 5V/2A DC power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

GT-802

- One 1000BASE-SX port with SC connector
- Supports fiber optic up to 550m

GT-802S

- One 1000BASE-LX port with SC connector
- Supports fiber optic up to 20km

GT-805A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

GT-806A15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GT-806B15

- One 1000BASE-LX port with WDM Connector
- Supports fiber optic up to 20km

GT-806A40

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 40km

GT-806B40

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 40km

GT-806A60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

GT-806B60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km


GT-1205A

- Dual 100/1000BASE-X mini-GBIC SFP slot
- DIP Switch for 100FX or 1000X SFP supports on dual SFP slots
- Supports fiber optic up to 120km (depending on SFP module)
- One 10/100/1000BASE-T Copper Port
- 3-port switch mode or redundant mode
- Hardware fiber port redundancy
- IEEE 802.3x flow control

GT-805A-PD

- PoE Powered
- Compliant with 802.3af/at
- PoE/5V DC dual power input
- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

Fast Ethernet Media Converters

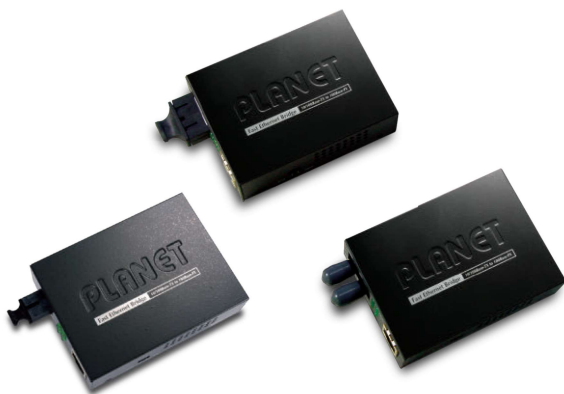

PLANET FT-80x series is a Fast Ethernet Bridge 100BASE-FX fiber to 10/100BASE-TX shielded twisted pair (STP) converter. It supports both half-duplex and full-duplex operations and a variety of fiber options. The converter automatically adapts to the highest level of performance supported by the device connected to the STP port.

The fiber port of FT-80x series operates at 1310nm and uses ST, SC, MTRJ and WDM connectors. Multi-mode models support distances up to 2km and single-mode models that support distances up to 15/20/35/50/60km are available.

PLANET FT-80x series is with LFP (Link Fault Pass-through) function, LLCF/LLR and the DIP Switch design. LLCF/LLR can immediately alarm administrators the problem of the link media and provide efficient solution to monitoring the network. The DIP switch provides disabling or enabling the LFP function.

The FT-80x series can be used as a standalone unit when powered by its DC adapter or used as a slide-in module to PLANET 10-/19-inch 7-/15-slot Media Converter Chassis (MC-700/MC-1500/MC-1500R/MC-1500R48).

- Complies with IEEE 802.3, IEEE 802.3u 10/100BASE-TX, 100BASE-FX
- IEEE 802.3x full-duplex flow-control and back-pressure in half-duplex eliminate the loss of packets
- Auto MDI/MDIX on TP port
- Rear DIP switch for FX duplex mode selection
- Side DIP switch for LFP mode selection
- LED indicators for easy network diagnostics
- External 5V/2A DC power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

FT-801

- One 100BASE-FX port with ST connector
- Supports fiber optic up to 2km

FT-802

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 2km

FT-803

- One 100BASE-FX port with MTRJ connector
- Supports fiber optic up to 2km

FT-802S15

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 15km

FT-802S35

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 35km

FT-802S50

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 50km

FT-806A20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

FT-806B20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

FT-806A60

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 60km

FT-806B60

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 60km

Standalone Managed Gigabit Media Converters




PLANET GT-90x series provides much flexibility with all kinds of 10/100/1000Mbps Ethernet Media on RJ45 port and offers highly stable Gigabit fiber performance. It supports conversion between 10/100/1000BASE-T and 1000BASE-LX/SX network, which includes SC/SFP/WDM connectors with single-mode or multi-mode media as required.

For efficient management, PLANET GT-90x Managed Gigabit Ethernet Media Converter series is equipped with remote Web/SNMP interface. With its built-in Web-based management, PLANET GT-90x series acts as an easy-to-use, platform-independent management and configuration facility.

The GT-90x series can be used as a stand-alone unit or as a slide-in module to PLANET Media Converter Chassis (MC-700, MC-1500 and MC-1500R, MC-1500R48). The Media Converter Chassis can provide DC power to the GT-90x series to maintain the fiber-optic network at the central location.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, 100BASE-FX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
- Choice of fiber connectors: SC, LC, WDM, multi-mode/single-mode
- LED indicators for easy network diagnostics
- Auto MDI/MDIX on TP port
- IP-based web interface
- SNMP v1/v2c monitor/private Enterprise MIB
- 802.1Q/Q-in-Q/Management VLAN
- Maximum frame size up to 16K bytes
- TS-1000 OAM/IEEE 802.3ah OAM/Loop Back Test
- External DC 5V 2A power supply
- Dying Gasp
- Compact in size, easy installation
- FCC Class A, CE Class A
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

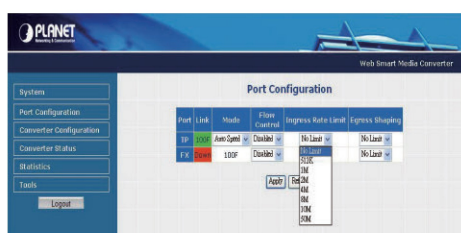

Remote Web Management

GT-902

- One 1000BASE-SX port with SC connector
- Supports fiber optic up to 550m
- Supports Dying Gasp

GT-902S

- One 1000BASE-LX port with SC connector
- Supports fiber optic up to 20km
- Supports Dying Gasp

GT-905A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (depending on SFP module)
- Supports Dying Gasp

GT-906A20

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km
- Supports Dying Gasp

GT-906B20

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km
- Supports Dying Gasp

GT-906A60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km
- Supports Dying Gasp

GT-906B60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km
- Supports Dying Gasp


VDSL2 Media Converters



PLANET VC series is Ethernet-over-VDSL2 Media Converter with high performance. It is based on two core networking technologies, Ethernet and VDSL2 (Very-high data-rate Digital Subscriber Line 2). The VDSL2 technology offers the absolutely fastest data transmission speeds over the existing copper telephone lines without the need of rewiring.

The VC series can be used as a standalone unit when powered by its DC adapter or used as a slide-in module to PLANET 10-/19-inch 7-/15-slot Media Converter Chassis (MC-700/MC-1500/MC-1500R/MC-1500R48).

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX and IEEE 802.3x flow control Ethernet standards
- CO/CPE selectable via DIP switch
- DMT (Discrete Multi-Tone) line coding
- IEEE 802.1Q VLAN tag transparent, 1536 bytes packet size support
- LED indicators for easy network diagnostics
- External DC 5V 2A power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

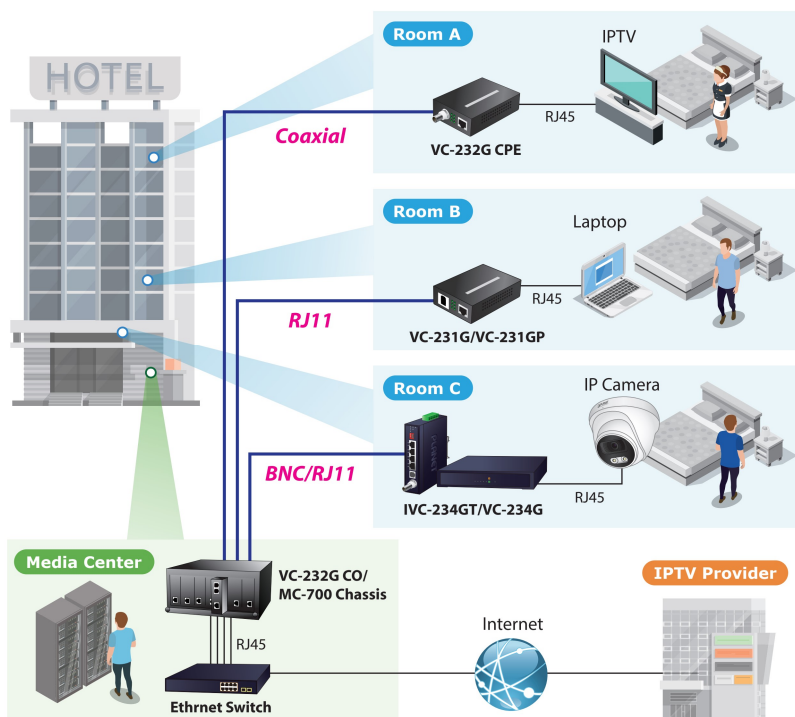

VC-231

- ITU-T G.993.2 VDSL2 (Profile 17a/30a)
- One RJ11 connector for VDSL2 connection with up to 1.4km distance support

VC-231G/VC-231GP

- One RJ11 connector for VDSL2 connection
- One 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- 30-watt 802.3at PoE+ PSE (VC-231GP)

VC-232G

- One BNC connector for VDSL2 connection
- Uses existing RG59/RG6 coaxial cable
- One 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

VC-234G/IVC-234GT

- One RJ11 connector for VDSL2 connection
- One phone connector for telephone connection
- Four 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- -40 to 75 degrees C operating temperature (IVC-234GT)

VC-231GF

- One RJ11 connector for VDSL2 connection
- One 1000BASE-X SFP
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

Serial over Ethernet Media Converters




PLANET ICS-10x Media Converter/Device Server series can convert Serial RS232/RS422/RS485 communication interface over Fast Ethernet networking. There are RJ45 and SC type connectors and single-mode/multi-mode media for customers' needs. Ethernet signal allows two types of segments to connect easily and efficiently. The ICS-10x converter can be used as a stand-alone unit or as a slide-in module to PLANET Media Converter Chassis (MC-700/MC-1500/MC-1500R/MC-1500R48). It greatly saves time and expense for users and SIs without the need of replacing the existing serial equipment and software system.


The ICS-10x enables the serial equipment to be connected via IP-based transmission. It also enables them to be connected to a TCP/IP networking immediately. The ICS-10x provides management through Web interface. It supports application mode, serial operation mode alarm connection and IP address, etc. It helps the network administrators to reduce the amount of valuable time spending on detecting and locating network problems, otherwise, it requires visual inspection of cabling and equipment. For large networking environment, multiple connection options are available with the ICS-10x Media Converter series as well.

- Complies with IEEE 802.3, IEEE 802.3u 10/100BASE-TX, 100BASE-FX standard
- Choice of fiber connectors: SC/LC, multi-mode/single-mode fiber
- IP-based web interface
- SMTP e-mail for alarm notification of events
- LED indicators for easy network diagnostics
- PLANET Smart Discovery utility finds ICS-10x devices on the network automatically
- Firmware upgrade via HTTP protocol
- Reset button on the front panel for reset to factory default
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

Standalone Installation-Device Gateway Server

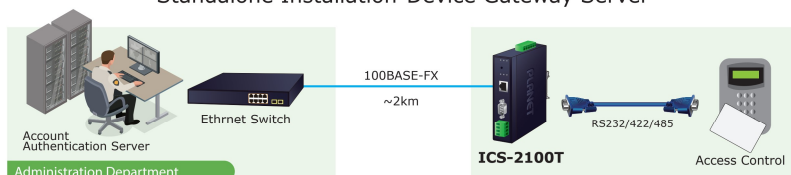

Pair Connection-Local to Remote Serial Extension

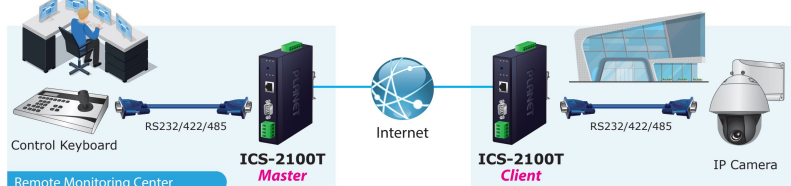

ICS-110

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX RJ45 interface with auto MDI/MDI-X function

ICS-115A

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 100BASE-FX SFP slot

ICS-120

- Two DB9 interfaces support RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX

ICS-2100T

- 1-port 10/100BASE-TX
- 1-DB9 interface supports RS232
- 1-Terminal block for RS422/RS485
- 9~48V DC/24V AC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case

ICS-2105AT/ICS-2102T/ICS-2102TS

- 1-port 100BASE-FX SFP slot (ICS-2105AT)
- 1-port 2km 100BASE FX SC (ICS-2102T)
- 1-port 30km 100BASE FX SC (ICS-2102TS)
- 1-DB9 interface supports RS232
- 1-Terminal block for RS422/RS485
- 24V AC and 9~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case

ICS-2200T

- 2-port 10/100BASE-TX
- 2 RS232/422/485 with DB9 interface
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case

ICS-2400T

- 2-port 10/100BASE-TX
- 4 RS232/422/485 with DB9 interface
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP40 metal case

10G Ethernet Media Converter



With target applications including 1Gbps, 2.5Gbps, 5Gbps and 10G Ethernet switching and aggregation, PLANET IXT and XT 10G Media converter series is ideal for wide applications for copper to fiber media conversion wherever 10Gigabit bandwidth is required.

The IXT and XT series has one RJ45 port and one SFP+ slot. It supports 10Gigabit Ethernet media conversion from copper 10GBASE-T to fiber multi-mode or single-mode, utilizing 10GBASE-SR or 10GBASE-LR SFP+ transceiver installed in the SFP+ slot to extend distances to servers, switches and patch panels. The deployment distance can be extended from 300 meters (multi-mode) to up to 80 kilometers (single-mode).

The IXT series is designed for use in network environments where the ultra-high bandwidth provided by 10Gigabit Ethernet is required, for example, data center cloud computing, enterprise backbones, campus networks, and carrier infrastructure.

XT-705A

- One 10GBASE-X SFP+ slot
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- Low power consumption
- Compact size; compatible with MC-700/ MC-1500 Chassis

10G SFP+ NBASE-T

IXT-705AT

- One 10GBASE-X SFP+ slot
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- -40~75 degrees C operating temperature
- IP30 metal case
- Low power consumption

10G SFP+ NBASE-T

Video over Fiber Optic Converters



PLANET has developed the video over Gigabit fiber media converter kit, VF-101G/102G/106G/402-KIT, which is ideal for extending the distance and signal conversion by transmitting the AHD/CVI/TVI/CVBS video and data over the fiber-optic cable.

The VF-10xG series and VF-402 include different types of fiber connectors such as ST, FC and WDM-SC which enable CCTV applications to replace the traditional coaxial cable with stable fiber cable performing more efficiently.

Adopting the intelligent encoding/decoding technology and with the compact box, the VF-10xG-KIT video over fiber media converter series enables videos to be delivered in high quality over a distance of up to 20km long.

- High-speed synchronous digital transmission technology
- 8-/10-bit digital video signal sampling
- Data type: RS485
- PAL, NTSC, SECAM compatible
- Long-distance data transmission of 20km
- Guarantees safe transmission under poor electromagnetic environment
- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- Compact size, wall mounting and DIN-rail supported, easy installation
- Standalone or work with PLANET MC-700/1500/1500R media converter chassis (For VF-10XG series)

VF-101G-KIT

- Compliant with hybrid video (AHD/TVI/ CVI/CVBS)
- ST multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-102G-KIT

- Compliant with hybrid video (AHD/TVI/ CVI/CVBS)
- FC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-106G-KIT

- Compliant with hybrid video (AHD/TVI/ CVI/CVBS)
- WDM-SC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-402-KIT

- Compliant with hybrid video (AHD/TVI/ CVI/CVBS)
- FC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -20 to 70 degrees C
- Fiber optic transmission of four video signals on one fiber with RS485 data signals